



Door Chime Power Socket with 100m Range



DOOR CHIME

POWER

Double switched 13 Amp power socket with built in door chime and push button

FEATURES


- Integrated door chime keeps sockets free
- 100m (open air) wireless range - suitable for large homes
- Adjustable volume up to 80dB - volume button for easy adjustment and mute LED visual option
- LED indicator - visual indication of door chime activation
- 6 melodies - a choice of 4 x 'Ding Dong' and 2 x 'Westminster'
- Random generated one in a million pairing code for no interference
- Produced in white moulded urea material with inherent antimicrobial properties
- Screw cover caps for a sleek appearance
- Angled, colour coded terminals with captive screws
- Twin earth for high integrity circuits
- Minimum mounting box depth: 25mm
- Battery powered IP44 rated push button supplied with CR2032 battery

PRODUCT IMAGES



822BELL

LINE DIAGRAMS

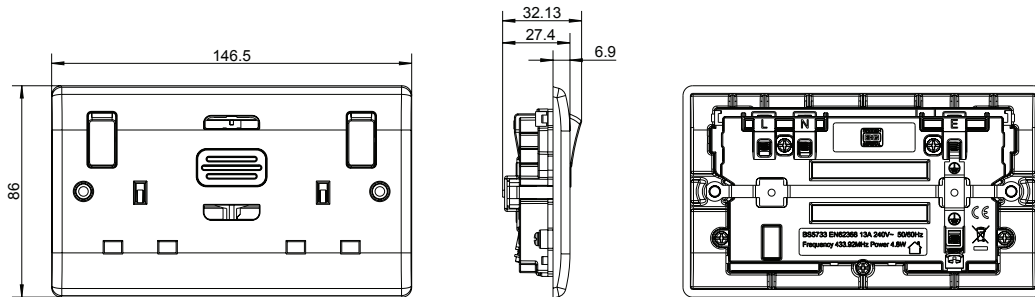

822BELL

PACKAGING INFORMATION

Cat No.	Finish	Packaging Type			Pack Quantity			Barcode		
		Product	Inner Box	Outer Box	Each	Inner Box	Outer Box	Individual	Inner Box	Outer Box
822BELL-MP	WH NX 13A 2G SW SKT + DR CM	Window Box	Box	Carton	1	5	20	5050765199582	5050765199599	5050765199605

WEIGHTS & DIMENSIONS

Cat No.	Finish	Dimensions (H x W x D) cm				Weight (kg)				CBM (m ³)
		Unpacked Product	Packed Product	Inner Box	Outer Box	Each	Packed Product	Inner Box	Outer Box	Outer Box
822BELL-MP	WH NX 13A 2G SW SKT + DR CM	Socket: 8.6 x 14.6 x 3.3 Bell: 8 x 3.5 x 2.0	17.2 x 22.2 x 3.4	16.2 x 17.7 x 22.7	24.6 x 33.8 x 36.8	0.195	0.29	1.56	6.602	0.03

Masterplug Help Line
03300 249 279

Supplied by
Luceco PLC
Stafford Park 1 Telford TF3 3BD ENGLAND

Visit our website at
www.masterplug.com



Door Chime Power Socket with 100m Range



DOOR CHIME

POWER

Double switched 13 Amp power socket with built in door chime and push button

TECHNICAL SPECIFICATIONS



Standard(s)	BS1363 EN62368
Rating	13 Amp 240V ~
Contact Gap	3.0mm minimum
Switch Type	Single Pole
Terminal Capacity - L & N	3 x 2.5mm ² , 3 x 4.0mm ² & 2 x 6.0mm ²
RoHS Directive	Yes, conforms
WEEE Directive	Yes
Mounting Box Depth (Min)	25mm
Fixing Centres	120.6mm
Push Button Battery	1 x 3V CR2032
Push Button	IP44
Melody Count	6
Sound Level	80dB
Range	100M (open air)

IF IN DOUBT CONSULT A QUALIFIED ELECTRICIAN

IMPORTANT

This product does not consist of any serviceable parts and should not be repaired. The device should not be operated by persons who have a lack of experience or knowledge in using such products. People who have a reduced physical, sensory or mental capability should be supervised or given instruction when operating. Children should be supervised, so that they do not play with the device.

Masterplug Help Line
03300 249 279

Supplied by
Luceco PLC
Stafford Park 1 Telford TF3 3BD ENGLAND

Visit our website at
www.masterplug.com