



# USB surge extension lead



# HIGH GLOSS USB

## POWER

power and charge your USB devices with sockets protected against damaging surges and spikes

### FEATURES

- Two USB ports (2.1A shared)
- Protects valuable electrical equipment from surges and spikes
- Unlimited value, 3 year connected equipment warranty
- LED power and surge indicators
- Wall fixing option



### PRODUCT IMAGES




SRGU4xPB2



SRGU4xPW2

### LINE DIAGRAMS

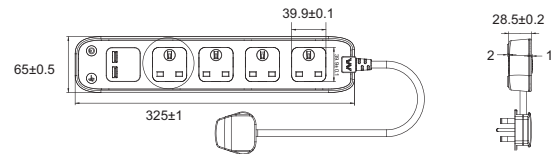

### PRODUCT INFORMATION

Part Number	SRGU4xPy2
Part Number Note	x = length of cable in metres, y=colour
Product Dimensions	Height 28.5mm x Width 325mm x Depth 65mm
Sockets	4

### TECHNICAL SPECIFICATIONS

Standard(s)	This product is certified to applicable British safety standards BS5733, BS EN 60950-1
Wall Mounting Option	Yes
Maximum Load (Wattage)	13A: 3120 Watts, 240 Volts
IF IN DOUBT CONSULT A QUALIFIED ELECTRICIAN	



### SURGE TECHNICAL DATA

Protection	3 x 14 MOV + 1 x GDT
Maximum Surge Energy	375 Joules
Maximum Surge Current	13500 Amps
Clamping Voltage	775 Volts
Response Time	< 10nS
Thermal Cut Out	Yes
Protection	L-N, L-E, N-E
Surge Protection Indicator	Yes - White
Power Indicator	Yes - Blue

### SAFETY WARNING

PLEASE READ CAREFULLY AND USE IN ACCORDANCE WITH OUR SAFETY INSTRUCTIONS BELOW

- |  |   |  |   |
|--|---|--|---|
| <input checked="" type="checkbox"/> <b>DO</b>    | Uncoil cable before use                         | <input checked="" type="checkbox"/> <b>DON'T</b> | Allow heavy tools etc to hang unsupported on the cable or from the socket |
| <input checked="" type="checkbox"/> <b>DO</b>    | Position the cable carefully to avoid accidents | <input checked="" type="checkbox"/> <b>DON'T</b> | Remove the plug and wire directly into a mains supply                     |
| <input checked="" type="checkbox"/> <b>DON'T</b> | Use in wet conditions                           | <input checked="" type="checkbox"/> <b>DON'T</b> | Exceed the total maximum load.  |

Masterplug Help Line

**03300 249 279**

Supplied by

**Luco PLC**

Stafford Park 1 Telford TF3 3BD ENGLAND

Visit our website at

**www.masterplug.com**